


DATASHEET

SPECIFICATIONS:


***Removal Type LC Clip**

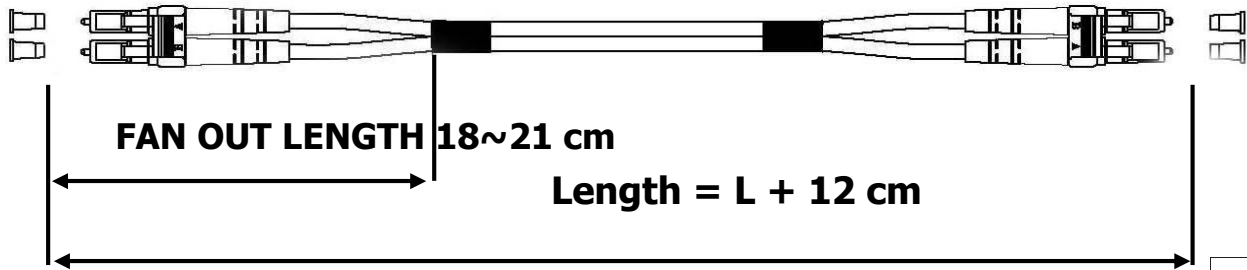

DUPLEX LC-PC/SC-PC Multi Mode 62.5/125 OM1 LSZH Orange



Cable Description

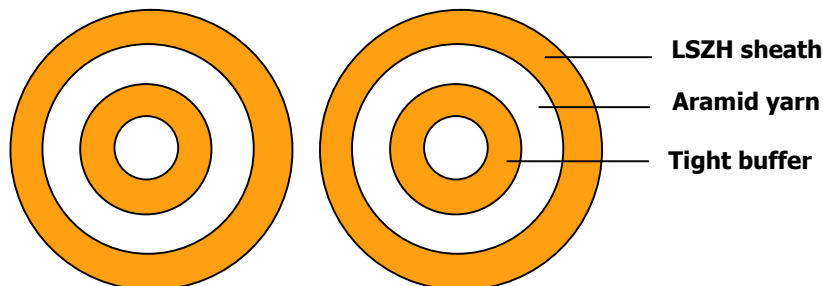

- Semi tight buffer fiber
- Flame-retardent jacket (LSZH) Orange
- Small bending radius
- Temperature range:
 - During installation: -5°C up to + 50°C
 - During operation: -20°C up to + 60°C
 - During transport & storage: -25°C up to +70°C
- Fiber optic cable performance
- Number of fiber: 62.5/125um OM1
- Outside diameter: 3.0mm
- Semi tight buffer: 0.9mm
- Nominal weight: 6,7kg
- Bending radius: >2 5mm
- Maximum attenuation:
 - <0.4dB/km@1310nm

LC/PC-SC/PC, Duplex, OM1, 3.0mm
Fiber Diameter: 62.5/125µm

PTFMD-X-04F

- <0.3dB/km@1550nm
- Measurement: Wavelength (SM-λ=1310nm & 1550nm, MM-λ 850nm)
- Product packing:
 - Zipper size – 230mm x 230mm
 - 1 pack – 1 patch cord
 - Label size – 90mm x 55mm

Optical Measurement	Single mode (UPC)	Multi mode (PC)
Insertion loss	<0.3dB	<0.3dB
Return loss	>50dB	