


DATASHEET

SPECIFICATIONS:


*Removal Type LC Clip

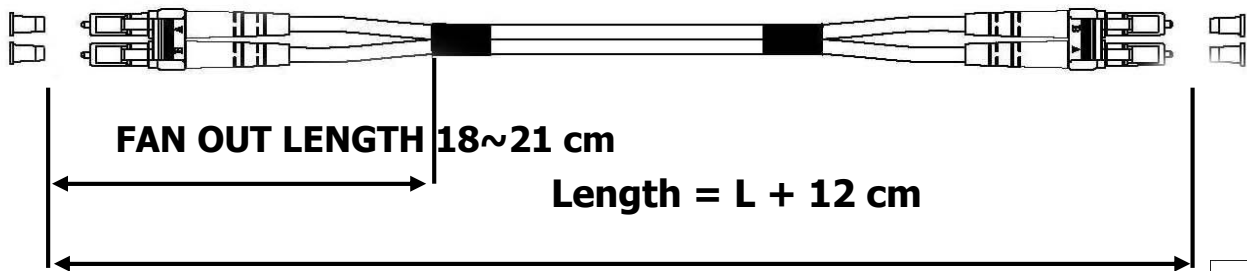

DUPLEX LC-PC/LC-PC Multi Mode 50/125 OM3 LSZH Aqua



Cable Description

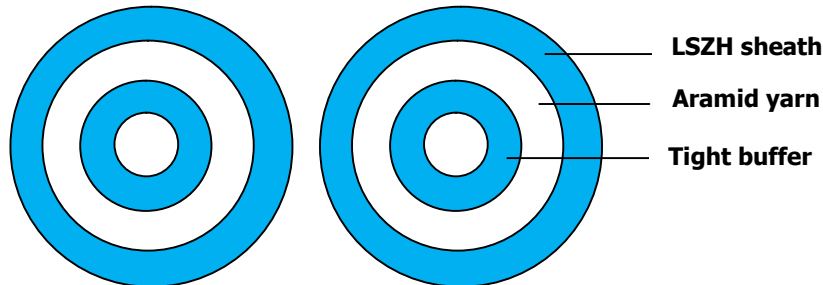

- Semi tight buffer fiber
- Flame-retardent jacket (LSZH) orange
- Small bending radius
- Temperature range:
 - During installation: -5°C up to + 50°C
 - During operation: -20°C up to + 60°C
 - During transport & storage: -25°C up to +70°C
- Fiber optic cable performance
- Number of fiber: 50/125um OM3
- Outside diameter: 3.0mm
- Semi tight buffer: 0.9mm
- Nominal weight: 6,7kg
- Bending radius: >25mm
- Allowable tensile: 200N



LC/PC-LC/PC, Duplex, OM3, 3.0mm
Fiber Diameter: 50/125 μ m

PTFM03-X-16F

- Crush resistant N/1000mm: 3000
- Measurement: Wavelength (SM- λ =1310nm & 1550nm, MM- λ 850nm)
- Product packing:
 - Zipper size – 230mm x 230mm
 - 1 pack – 1 patch cord
 - Label size – 90mm x 55mm

Optical Measurement	Single mode (UPC)	Multi mode (PC)
Insertion loss	<0.3dB	<0.3dB
Return loss	>50dB	